



# ProVenture

Solutions Limited

## ProV150 Injection Resin System


### Features

- Cures at -15°C
- Non flammable.
- Excellent chemical resistance.
- Suitable for underwater applications.
- Mild odour.
- Suitable for close to the edge application.
- Suitable for hollow base materials including concrete, brick and stone.

### Suitable Applications

Concrete	Blockwork	No fines	Brickwork

### Setting Instructions

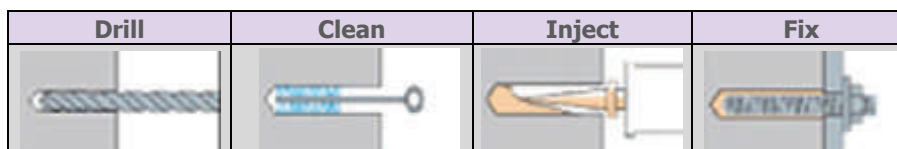

### Setting Times

Temperature (°C)	-15	-10	-5	0	5	10	15	20	25	>30
<b>ProV150 gel time (min)</b>	5hrs	3hrs	40	20	15	12	9	6	4	2
<b>ProV150 setting time (min)</b>	24hrs	20hrs	150	120	105	90	75	60	45	35
<b>Hilti HY150 Resin setting time (min)</b>			360	180	90		50			40

### Accessories

<p><b>Chemical Anchor Rod</b></p>  <p>Sizes M8 to M30, Available in Zinc Plated grade 5.8, hot dipped galvanised &amp; Stainless steel A4-70/316</p>	<p><b>Resin Sleeve</b></p>  <p>Sizes M8 to M16, To be used in conjunction with injection resin and threaded rod for fixing in hollow base materials.</p>
<p><b>Injection Resin Dispenser</b></p>  <p>for use with ProV150 injection resin</p>	<p><b>Blow Out Pump</b></p> 
<p><b>Resin Mixer Nozzle</b></p> 	<p><b>Hole Cleaning Brush</b></p> 

ProVenture Solutions Limited, Towngate Works, Dark Lane, Mawdesley, Ormskirk, L40 4BN

Tel (01704) 823555 Fax (01704) 822213 Mob (07764) 602702 Email sales@proventure.co.uk