



JCP CONSTRUCTION PRODUCTS

Galvanised Ankerbolt

Data Sheet

Galvanised Ankerbolt

A hardened steel self tapping anchor suitable for use in a number of base materials. The self tapping action provides a positive anchorage in concrete, concrete blocks, brick and stone.

Galvanised to 45µm




Flange Head (6mm diam.)




Hex. Head (8, 10, 12 mm diam.)

Part Number	Drill Diameter mm	Anchor Length mm	Maximum Fixture Thickness mm	Minimum Hole Depth mm	Driver Type	Quantity per Box	Rec. Tensile Resistance kN	Rec. Shear Resistance kN
JAB06/08050G	6	50	20	40	10mm A/F	100	1.9	3.6
JAB06/08075G	6	75	45	40	10mm A/F	100		
JAB06/08100G	6	100	55	45	10mm A/F	100		
JAB08/10060G	8	60	20	55	15mm A/F	100	2.9	8.6
JAB08/10100G	8	100	60	55	15mm A/F	100		
JAB08/10150G	8	150	110	55	15mm A/F	50		
JAB10/12060G	10	60	10	70	17mm A/F	50	4.4	14.3
JAB10/12100G	10	100	50	70	17mm A/F	50		
JAB10/12150G	10	150	100	70	17mm A/F	25		
JAB12/14100G	10	100	40	85	19mm A/F	50	6.3	19.3
JAB12/14150G	12	150	90	85	19mm A/F	20		
JAB12/14200G	12	200	140	85	19mm A/F	20		


Installation Instructions




Position Fixture and drill correct Diameter Hole to correct Depth

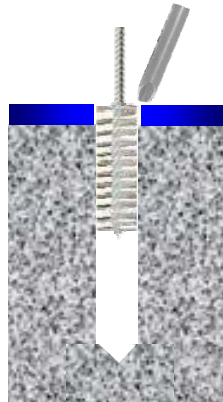

Remove all dust by Brushing and Blowing

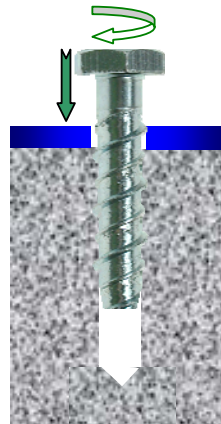

Insert Ankerbolt through fixture and screw in using a downward pressure

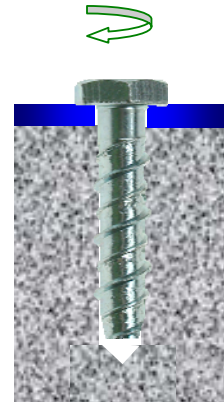

Tighten Ankerbolt to Recommended Torque

Dartford 01322 277733
Elland 01422 370121
Milton Keynes 01908 330050

Stone 01785 819819
Swindon 01793 527829

