



GRATING FASTENER SYSTEM

The GRATF-G grating fastener system combines a shot fired threaded stud and grating disc to secure open mesh flooring in corrosive and outdoor environments.

The threaded stud and grating disc are Geomet coated, which is equivalent to hot dipped galvanised, with a guaranteed **720 hours** salt spray resistance before the appearance of red rust. It is an alternative to the Hilti X-FCM-M grating fastener disc. Full test data available.

It is suitable for fixing grids up to 40mm thick, with a mesh dimension no less than 18x18mm, in base steel at least 6mm thick.

BENEFITS


- **GEOMET 321 COATED**
equivalent to hot dipped galvanised
- **720 HOURS SALT SPRAY RESISTANCE**
before appearance of red rust
- **TOTAL MOBILITY**
no electrical power required
- **FAST, ECONOMICAL AND CONVENIENT**
up to 120 grating fastenings per hour by one user
- **LOCKING TABS ON THE GRATING DISC**
help prevent the fastener working loose
- **NON SLIP SURFACE**
no tripping hazard

APPLICATIONS

- chemical and oil industries
- off shore and ship building
- food industry
- water supply treatment works
- steel industry
- power plants
- public facilities


Please contact us for more information on
01704 897 015 or visit www.proventure.co.uk

GRATING DISC - GEOMET

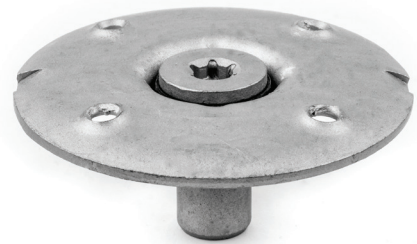

Item	shank length	head diameter	grid thickness
GRATF25G	22.8mm	52mm	25mm
GRATF30G	27.8mm	52mm	30mm
GRATF40G	37.8mm	52mm	40mm

THREADED STUD - GEOMET



GRATF8-G threaded stud M8-30/15, Geomet coated
thread length: 15mm, overall length: 30mm

P370-GR GRATING TOOL



P370-GR Grating tool

Powder actuated tool for fastening gratings using the M8-30/15 threaded stud and GRATF grating disc.

The GRATF grating fastener system can also be used with the Hilti DX cartridge tool range.

