



1818/1825/1525 DUSTER EXPERT SDS-max/plus EXTRACTION DRILL BITS

The innovative 2-in-1 drill bit: enhances dust-free drilling.



- ✓ The Duster Expert **combines drilling and dust extraction** in a single step for all concrete work
- ✓ **Removes 98% of drilling dust** where it originates at the drill tip
- ✓ **Rugged design** of the drill and shaft for a long service life
- ✓ **Highest productivity on setting chemical anchors** as there is no need to clean the drilled hole
- ✓ **Fast thanks to extra large openings at the tip** and reduced drilling resistance as drilling dust is routed internally
- ✓ **Saves annoying cleaning** of the surroundings
- ✓ **Perfect for use** in interior applications

HELLER-TV TUTORIALS
www.hellertools.com/en/heller-tv




Bionic
(SDS-max
≤ 16 mm)



Y-Cutter
(SDS-max
18 - 35 mm)



Bionic
(SDS-plus)

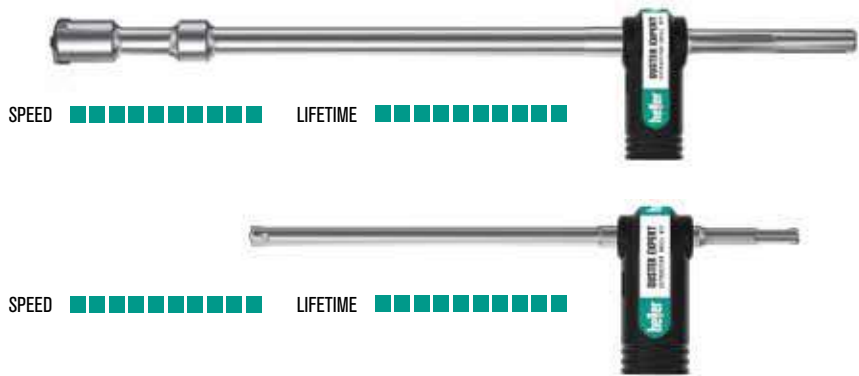

		★★★★★	★★★★★	★★★★★	★★★★★	★★★★★	★★★★★	★
SDS-max	SDS-plus	Concrete	Sand lime brick	Brick	Masonry	Natural stone	Granite	Reinforced concrete

1818 DUSTER EXPERT SDS-plus



Bionic	29630 4	6	100	220	1
	29727 1	8	100	220	1
	28970 2	8	150	270	1
	29728 8	10	100	220	1
	28971 9	10	150	270	1
	28783 8	12	200	320	1
	28784 5	14	250	370	1
	28786 9	16	250	370	1
	28787 6	18	250	370	1
	28788 3	20	250	370	1
28789 0	24	250	370	1	

1526 ADAPTER



29725 7	SDS-plus 6 - 10 mm	1
28904 7	SDS-plus 12 - 24 mm	1
28905 4	SDS-max	1

3604 DUSTER PRO ANTI-DUST ACCESSORIES

Adapters for dust avoidance.

- ✓ Extraction adapter for connecting to a standard vacuum cleaner
- ✓ Prevents ambient dust in the room
- ✓ Dust is extracted directly at the material surface
- ✓ Autonomously adheres to the wall with vacuum power
- ✓ Suitable for diameters of up to 42 mm

1818 DUSTER EXPERT SET SDS-plus



29730 1	6, 8, 10	100	220	5
---------	----------	-----	-----	---

1825/1525 DUSTER EXPERT SDS-max



Bionic	29724 0	14	400	600	1
	29419 5	16	400	600	1
Y-Cutter	28622 0	18	400	600	1
	28623 7	20	400	600	1
	28624 4	22	400	600	1
	28825 5	24	400	600	1
	28625 1	25	400	600	1
	28626 8	28	400	600	1
	28627 5	30	400	600	1
	28628 2	32	400	600	1
	28629 9	35	400	600	1
	29095 1	40	400	600	1



28619 0	up to Ø 42 mm	1
---------	---------------	---